


COMMON RENTAL SERIES

Everlasting classic

- Rental | Fixed installation
- Incredible cost-performance solution for indoor & outdoor cases

Application

- Rental & Events
- Digital signage
- HD-DOOH

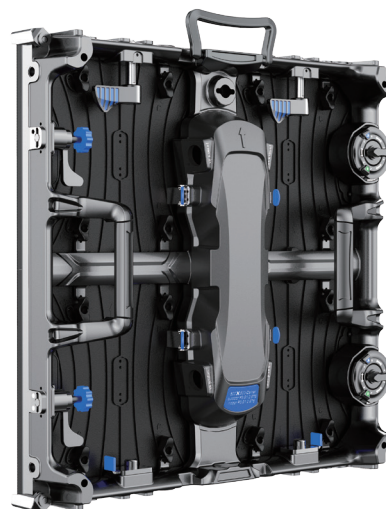

WATERPROOF



MUTE



LOW POWER



GOB OPTIONAL



ROBUSTNESS



HIGH CONTRAST




EASY MAINTENANCE

Specification List

Product Name	CR-1.9	CR-2.6	CR-3.9	CR Pro-2.6	CR Pro-2.9	CR Pro-3.9
Pixel Pitch (mm)	1.953	2.604	3.906	2,604	2,976	3,906
Pixel Density (dot/m ²)	262,144	147,456	65,536	147,456	112,896	65,536
Module Size (mm)	250*250					
Panel Size (mm)	500*500*82	500*500*82	500*500*82	500*500*83	500*500*83	500*500*83
Panel Resolution (dot)	256*256	192*192	128*128	192*192	168*168	128*128
Panel Material	Die-casting Aluminum					
Panel Weight (kg/pcs)	8	8	8	8.5	8.5	8.5
Brightness (cd/m ²)	800	800	1200	4500	5000	5000
Horizontal & Vertical Viewing Angle (Deg)	160/140	160/140	160/140	140/110	140/110	140/110
Contrast Ratio	4000:1					
Max. & Avg. Power Consumption (W/m ²)	680/225	640/210	640/210	1490/495	1200/400	875/290
Refresh Rate (Hz)	3840	3840	1920	3840	1920	1920
Maintenance Way	Front or Rear					
Installation Way	Rear					
IP Rate	IP20	IP20	IP20	IP65 / 54	IP65 / 54	IP65 / 54
Certifications	CE, RoHS, EMC, CCC					

Note: * Specifications are slightly different according to different configurations.

* All rights reserved to SHISAI.




Convenience & Versatility

- Modular design for indoor and outdoor use
- Fully front and rear maintenance with magnet

Multi-Curvable Lock System

- 0°, ±5° available


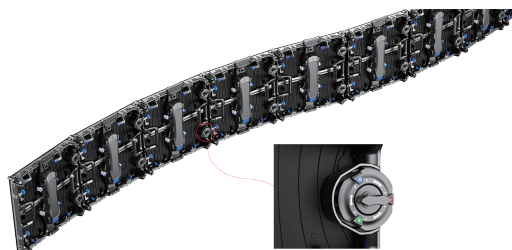


Corner Guard

- Protect the vulnerable corners during transportation

Trinity Positioning System

- Magnet, pin and linear rail bring quick installation and precise evenness

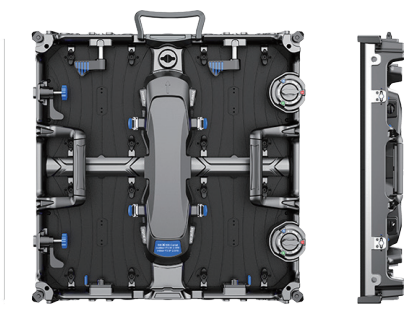
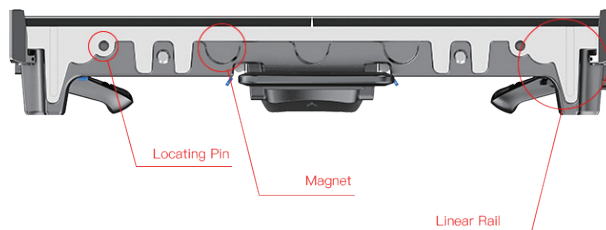


Ultra Slim and Lightweight

- 8kg/panel
- 82mm/panel

Module Security Lock

- Prevent modules from falling off or loosening due to the vibration or weakened magnet

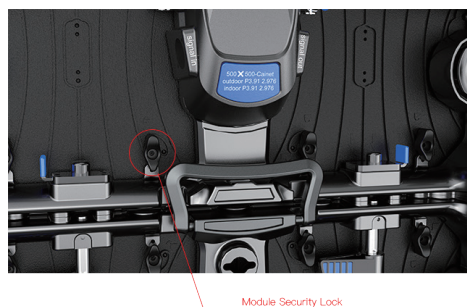

Strengthened Structure

- With optimized durability of panel distortion can be avoided