

EMBER V PRO SERIES



Make some noise

- High-end solution for brief installation

Application

- Brief and quick installation for temporary & permanent



HIGH
DEFINITION



WATERPROOF



MUTE



LOW POWER



ROBUSTNESS



HIGH
CONTRAST




EASY
MAINTENANCE

Specification List

Product Name	Ember V Pro-2.6	Ember V Pro-2.9	Ember V Pro-3.9	Ember V Pro-4.8	Ember V Pro-5.9
Pixel Pitch (mm)	2.604	2.976	3.906	4.81	5.95
LED Type	SMD1415	SMD1415	SMD1921	SMD2727	SMD2727
Pixel Density (dot/㎡)	147,456	112,896	65,536	43,264	28,224
Module Size(mm)	250*250				
Panel Size(mm)	500*500 / 500*750 / 500*1000*60mm				
Panel Resolution(dot)	192*192 192*288 192*384	168*168 168*252 168*336	128*128 128*192 128*256	104*104 104*156 104*208	84*84 84*126 84*168
Panel Material	Profile Aluminum				
Weight(kg/panel)	7/10/12.5				
Brightness(cd/㎡)	4500	4500	5000	5000	5000
H&V Viewing Angle	140/110				
Contrast Ratio	4000:1				
Max&Avg Power(W/㎡)	760/253	760/253	650/220	650/220	650/220
Refresh Rate (Hz)	3840				
Maintenance	Front & Rear				
Installation	Front & Rear				
IP Rate	IP65 & 54				
Certification	CE, EMC , CCC, ETL				

Note: * Specifications are slightly different according to different configurations.
* All rights reserved to SHISAI.

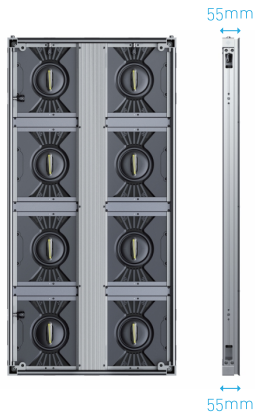


Super light-weight and ultra slim

- The panel body thickness is just 55mm

Quick lockers for 90°

- 90° corner could be easily achieved without connection plate.

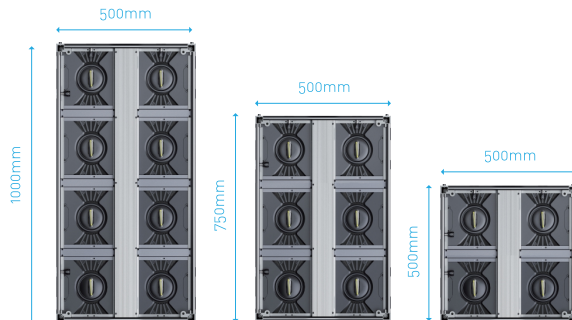


Variety of panel size

- 500×1000mm, 500×750mm, 500×500mm available

Quick and convenient maintenance & installation

- Full front and back access for any kinds of installation environment.

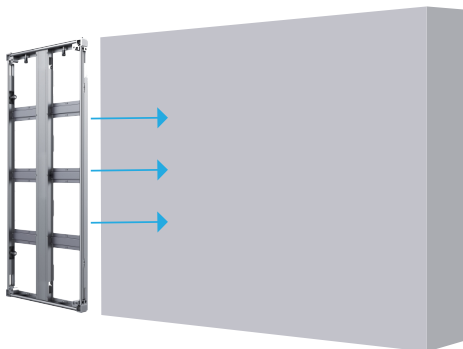

Frameless installation

- The ember v panels could be installed without frame on the wall.

Smart mini screen combo

- We offer the solution for mini size screen with all kits

